Data Mining
Classification: Basic Concepts and Techniques

Lecture Notes for Chapter 3

Introduction to Data Mining, 2nd Edition

by

Tan, Steinbach, Karpatne, Kumar

Model Evaluation

Model Evaluation

- Metrics for Performance Evaluation
  - How to evaluate the performance of a model?
- Methods for Performance Evaluation
  - How to obtain reliable estimates?
- Methods for Model Comparison
  - How to compare the relative performance among competing models?

Model Evaluation

- Metrics for Performance Evaluation
  - How to evaluate the performance of a model?
- Methods for Performance Evaluation
  - How to obtain reliable estimates?
- Methods for Model Comparison
  - How to compare the relative performance among competing models?

Metrics for Performance Evaluation

- Focus on the predictive capability of a model
  - Rather than how fast it takes to classify or build models, scalability, etc.
- **Confusion Matrix:**

		PREDICTED CLASS	
		Class=Yes	Class=No
ACTUAL CLASS	Class=Yes	a	b
	Class=No	c	d

a: TP (true positive)

b: FN (false negative)

c: FP (false positive)

d: TN (true negative)

Metrics for Performance Evaluation…

		PREDICTED CLASS	
		Class=Yes	Class=No
ACTUAL CLASS	Class=Yes	a (TP)	b (FN)
	Class=No	c (FP)	d (TN)

- Most widely-used metric:

$$\text{Accuracy} = \frac{a+d}{a+b+c+d} = \frac{TP+TN}{TP+TN+FP+FN}$$

Limitation of Accuracy

- Consider a 2-class problem
  - Number of Class 0 examples = 9990
  - Number of Class 1 examples = 10

- If model predicts everything to be class 0, accuracy is 9990/10000 = 99.9 %
  - Accuracy is misleading because model does not detect any class 1 example

Cost Matrix

		PREDICTED CLASS	
ACTUAL CLASS	C(i|j)	**Class=Yes**	**Class=No**
	Class=Yes	C(Yes|Yes)	C(No|Yes)
	Class=No	C(Yes|No)	C(No|No)

C(i|j): Cost of misclassifying class j example as class i

Computing Cost of Classification

Cost Matrix	PREDICTED CLASS		
	C(i|j)	+	-
ACTUAL CLASS	+	-1	100
	-	1	0

Model M_1	PREDICTED CLASS		
		+	-
ACTUAL CLASS	+	150	40
	-	60	250

Model M_2	PREDICTED CLASS		
		+	-
ACTUAL CLASS	+	250	45
	-	5	200

Accuracy = 80%

Cost = 3910

Accuracy = 90%

Cost = 4255

Cost-Sensitive Measures

$$\text{Precision (p)} = \frac{TP}{TP + FP}$$

$$\text{Recall (r)} = \frac{TP}{TP + FN}$$

$$\text{F-measure (F)} = \frac{2rp}{r + p} = \frac{2TP}{2TP + FN + FP}$$


- Precision is biased towards C(Yes|Yes) & C(Yes|No)
- Recall is biased towards C(Yes|Yes) & C(No|Yes)
- F-measure is biased towards all except C(No|No)

$$\text{Weighted Accuracy} = \frac{w_1 a + w_4 d}{w_1 a + w_2 b + w_3 c + w_4 d}$$

Model Evaluation

- Metrics for Performance Evaluation
  - How to evaluate the performance of a model?
- Methods for Performance Evaluation
  - How to obtain reliable estimates?
- Methods for Model Comparison
  - How to compare the relative performance among competing models?


Methods for evaluation

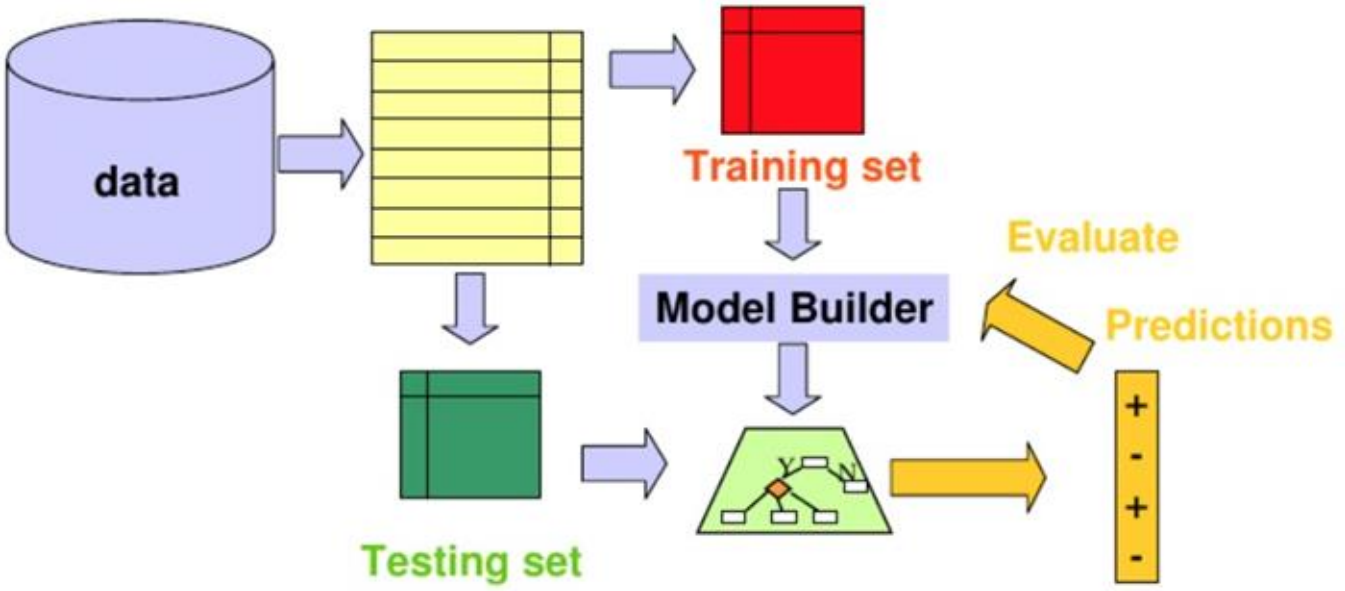

Parameter Tuning

- It is important that the test data is not used in any way to create the classifier
- Some learning schemes operate in two stages:
  - **Stage 1**: builds the basic structure
  - **Stage 2**: optimizes parameter settings
  - **The test data can't be used for parameter tuning!**
  - Proper procedure uses three sets:
    - training data,
    - validation data,
    - test data
  - **Validation data is used to optimize parameters**
- Once evaluation is complete, all the data can be used to build the final classifier
- Generally, the larger the training data the better the classifier
- The larger the test data the more accurate the error estimate

Evaluation: training, validation, test

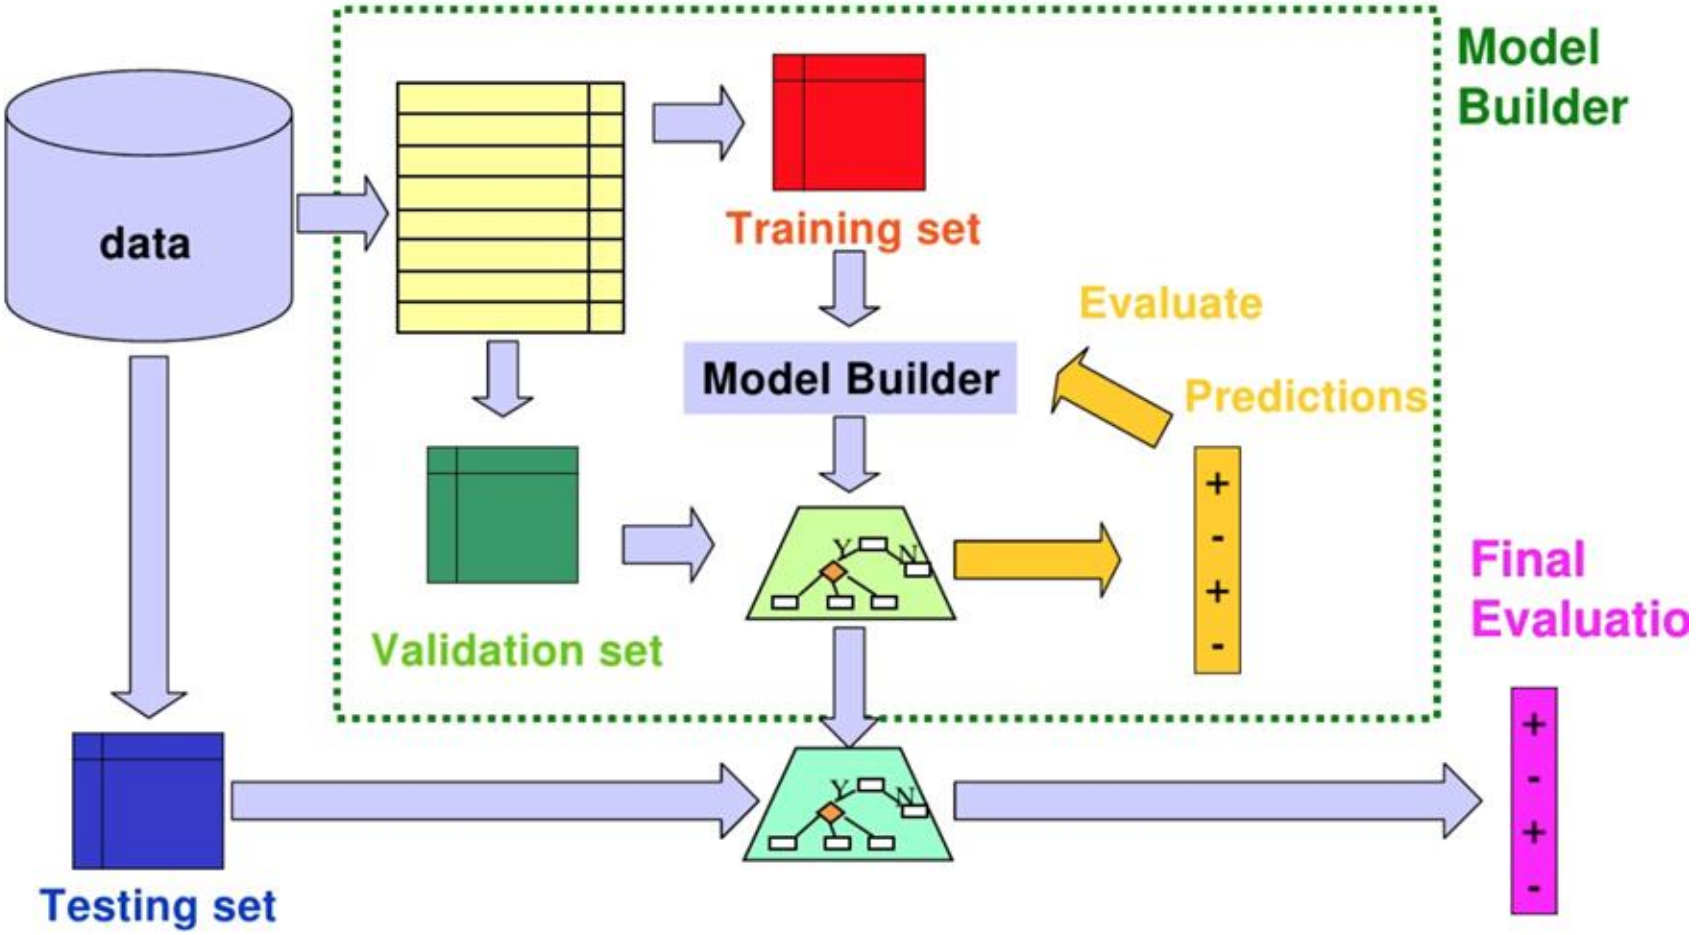


Methods for Performance Evaluation

- How to obtain a reliable estimate of performance?

- Performance of a model may depend on other factors besides the learning algorithm:
  - Class distribution
  - Cost of misclassification
  - Size of training and test sets

Learning Curve

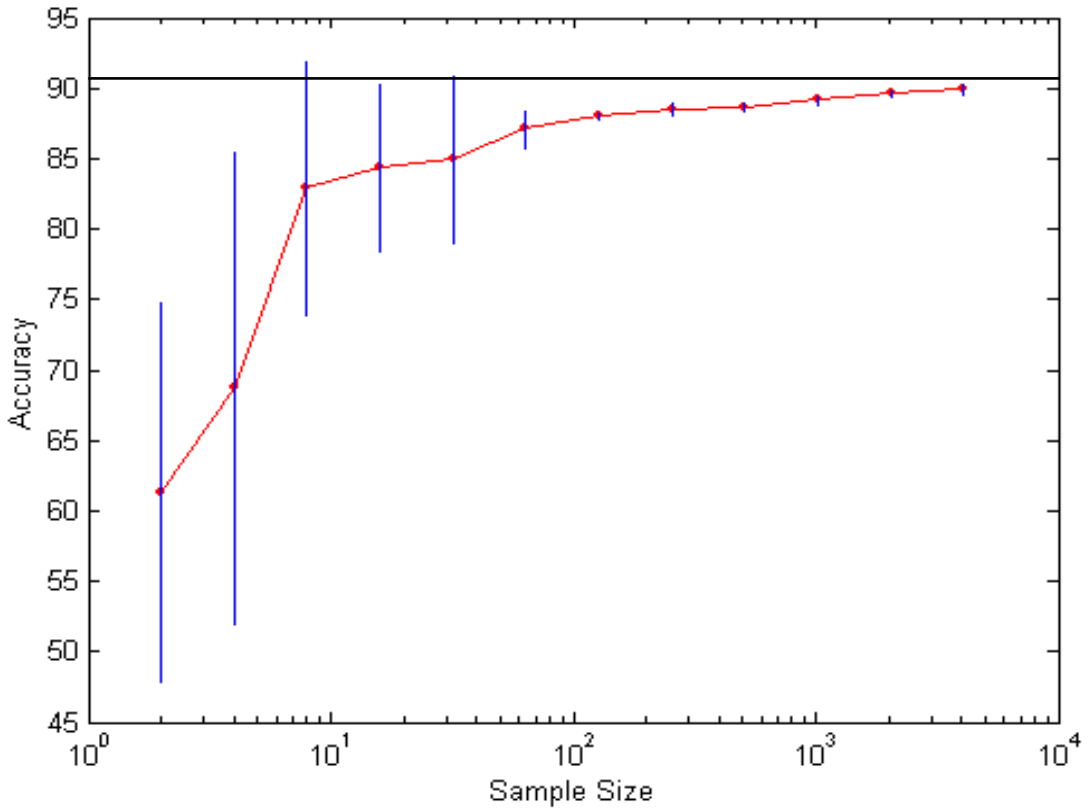

- Learning curve shows **how accuracy changes** with varying sample size
- Requires a **sampling** schedule for creating learning curve

Effect of small sample size:

- Bias in the estimate
- Variance of estimate

1. **How much a classification model benefits from adding more training data?**

1. **Does the model suffer from a variance error or a bias error?**

Methods of Estimation

- Holdout
  - Reserve 2/3 for training and 1/3 for testing
- Random subsampling
  - Repeated holdout
- Cross validation
  - Partition data into k disjoint subsets
  - k-fold: train on k-1 partitions, test on the remaining one
  - Leave-one-out: k=n
- Stratified sampling
  - oversampling vs undersampling
- Bootstrap
  - Sampling with replacement

Small & Unbalanced Data


- The holdout method reserves a certain amount for **testing** and uses the remainder for **training**
- Usually, **one third for testing**, the rest for training
- For small or "unbalanced" datasets, **samples might not be representative**
  - For instance, few or none instances of some classes
- Stratified sample
  - **Balancing the data**
  - Make sure that each class is represented with approximately equal proportions in both subsets

Repeated holdout method

- Holdout estimate can be made more reliable by **repeating the process with different subsamples**
  - In each iteration, a certain proportion is **randomly selected for training** (possibly with stratification)
  - The error rates on the different iterations are **averaged** to yield an overall error rate
- This is called the **repeated holdout method**
- Still not optimum: the different test sets overlap

Cross-validation

- Avoids overlapping test sets
  - **First step:** data is split into k subsets of equal size
  - **Second step:** each subset in turn is used for testing and the remainder for training
- This is called **k-fold cross-validation**
- Often the subsets are stratified before cross-validation is performed
- The **error estimates** are **averaged** to yield an overall error estimate
- **Even better:** repeated stratified cross-validation
  E.g. ten-fold cross-validation is repeated ten times and results are averaged (reduces the variance)

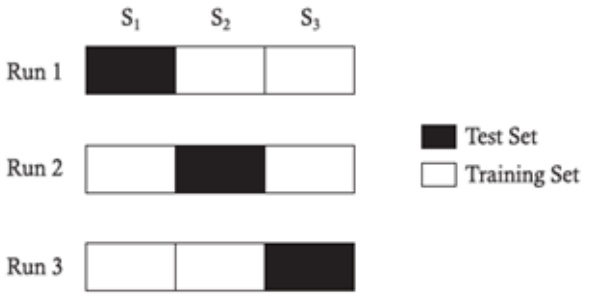

Model Evaluation

- Metrics for Performance Evaluation
  - How to evaluate the performance of a model?
- Methods for Performance Evaluation
  - How to obtain reliable estimates?
- Methods for Model Comparison
  - How to compare the relative performance among competing models?

ROC (Receiver Operating Characteristic)


- Developed in 1950s for signal detection theory to analyze noisy signals
  - Characterize the trade-off between positive hits and false alarms


- ROC curve plots TP (on the y-axis) against FP (on the x-axis)

- **Performance of each classifier represented as a point on the ROC curve**
  - changing the threshold of algorithm, sample distribution or cost matrix changes the location of the point

ROC Curve

- 1-dimensional data set containing 2 classes (positive and negative)
- any points located at x > t is classified as positive

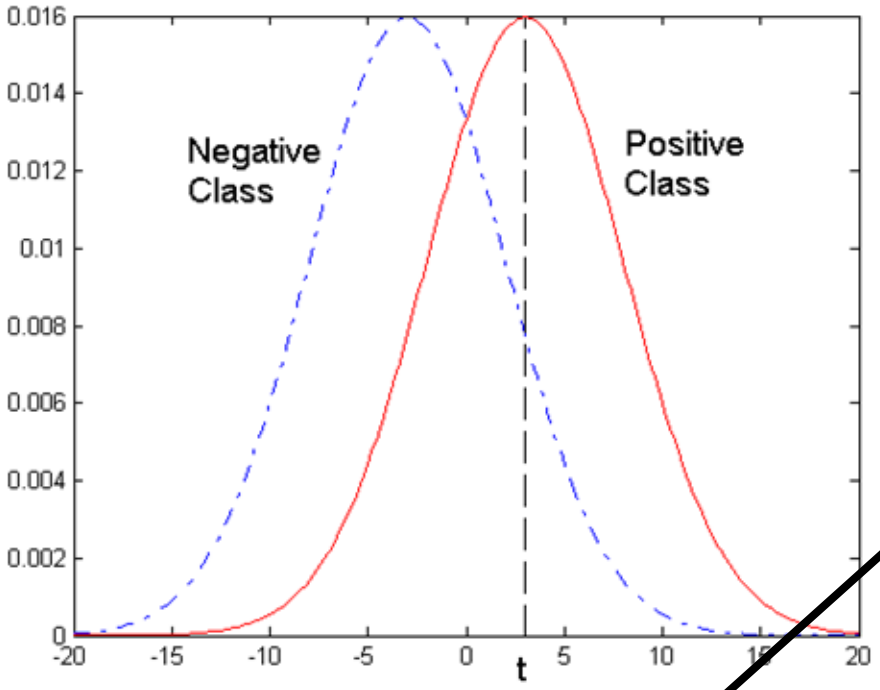

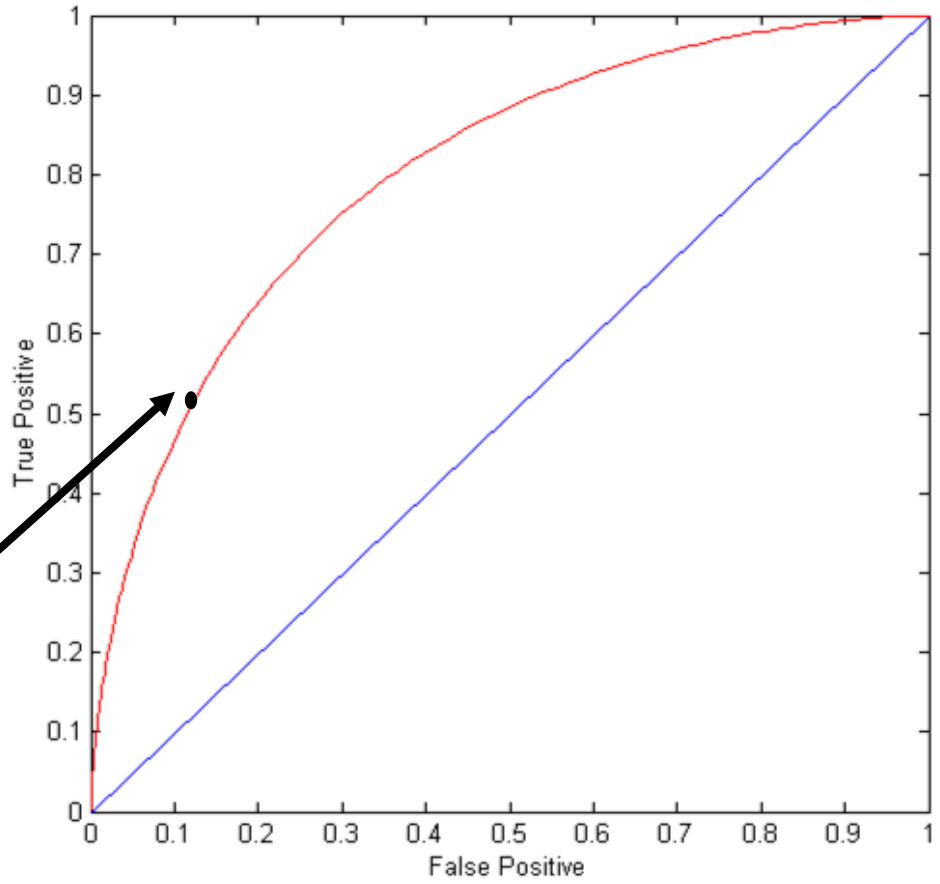

At threshold t:


TP=0.5, FN=0.5, FP=0.12, FN=0.88

ROC Curve


(TP,FP):

- (0,0): declare everything to be negative class
- (1,1): declare everything to be positive class
- (0,1): ideal

- Diagonal line:
  - Random guessing
  - Below diagonal line:
    - prediction is opposite of t true class

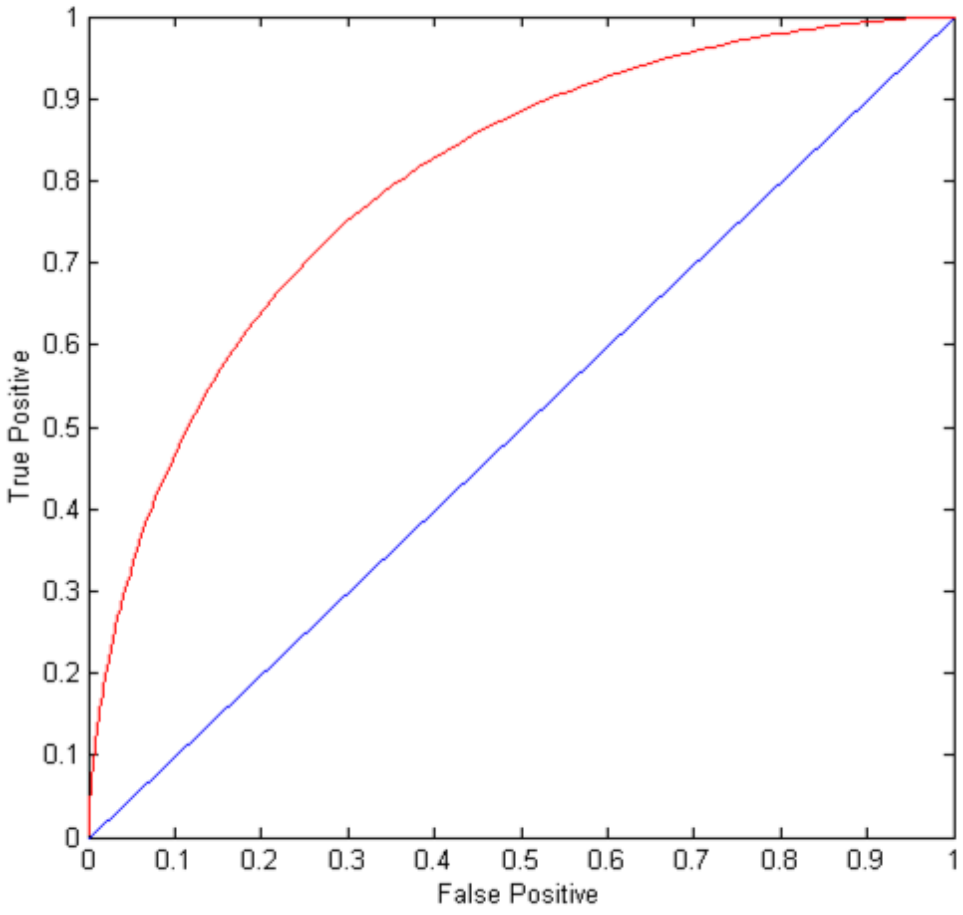

Using ROC for Model Comparison

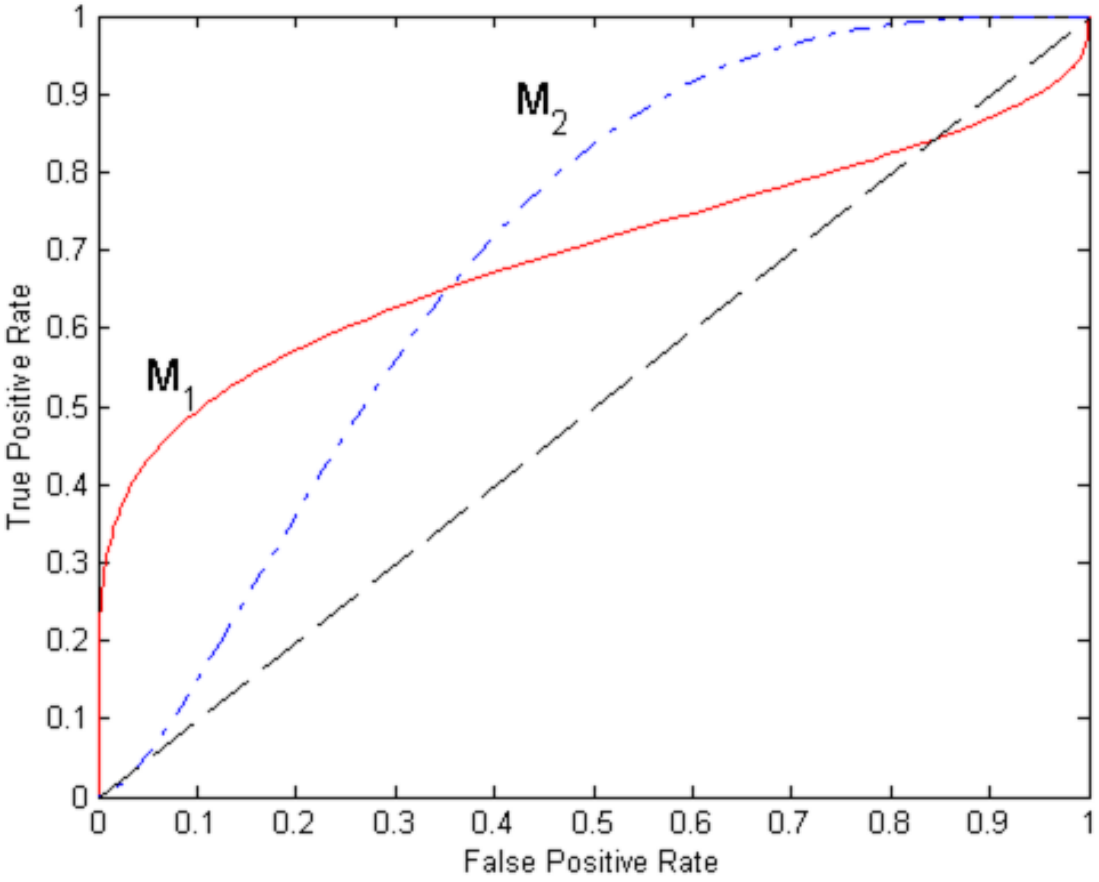

- No model consistently outperform the other
  - M_1 is better for small FPR
  - M_2 is better for large FPR
- Area Under the ROC curve
  - Ideal:
    - Area = 1
  - Random guess:
    - Area = 0.5

How to Construct an ROC curve


Instance	P(+|A)	True Class
1	0.95	+
2	0.93	+
3	0.87	-
4	0.85	-
5	0.85	-
6	0.85	+
7	0.76	-
8	0.53	+
9	0.43	-
10	0.25	+

- Use classifier that produces posterior probability for each test instance P(+|A)
- Sort the instances according to P(+|A) in decreasing order
- Apply threshold at each unique value of P(+|A)
- Count the number of TP, FP, TN, FN at each threshold
- TP rate, TPR = TP/(TP+FN)
- FP rate, FPR = FP/(FP + TN)

How to construct an ROC curve

	Class	+	-	+	-	-	-	+	-	+	+	
Threshold >=		0.25	0.43	0.53	0.76	0.85	0.85	0.85	0.87	0.93	0.95	1.00
	TP	5	4	4	3	3	3	3	2	2	1	0
	FP	5	5	4	4	3	2	1	1	0	0	0
	TN	0	0	1	1	2	3	4	4	5	5	5
	FN	0	1	1	2	2	2	2	3	3	4	5
→	TPR	1	0.8	0.8	0.6	0.6	0.6	0.6	0.4	0.4	0.2	0
→	FPR	1	1	0.8	0.8	0.6	0.4	0.2	0.2	0	0	0

ROC Curve:

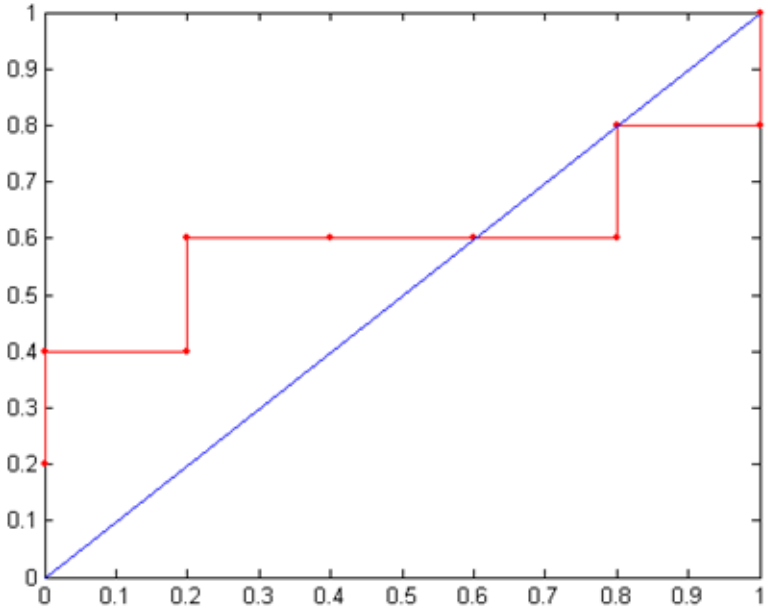

Inst.	P(+|A)	True Class
1	0.95	+
2	0.93	+
3	0.87	-
4	0.85	-
5	0.85	-
6	0.85	+
7	0.76	-
8	0.53	+
9	0.43	-
10	0.25	+

Test of Significance

- Given two models:
  - Model M1: accuracy = 85%, tested on 30 instances
  - Model M2: accuracy = 75%, tested on 5000 instances

- Can we say M1 is better than M2?
  - How much confidence can we place on accuracy of M1 and M2?
  - Can the difference in performance measure be explained as a result of **random fluctuations** in the test set?

Confidence Interval for Accuracy

- Prediction can be regarded as a Bernoulli trial (binomial random experiment)
  - A Bernoulli trial has 2 possible outcomes
  - Possible outcomes for prediction: correct or wrong
  - Probability of success is constant
  - Collection of Bernoulli trials has a Binomial distribution:
    - x ~ Bin(N, p) **x:** # of correct predictions, **N** trials, **p** constant prob.
    - e.g: Toss a fair coin 50 times, how many heads would turn up?
      Expected number of heads = N×p = 50 × 0.5 = 25


Given x (# of correct predictions) or equivalently, acc=x/N, and N (# of test instances)

Can we predict p (true accuracy of model)?

Confidence Interval for Accuracy

- For large test sets (N > 30),
  - acc has a normal distribution with mean p and variance p(1-p)/N
  - the confidence interval for acc can be derived as follows:

$$P(Z_{\alpha/2} < \frac{acc - p}{\sqrt{p(1-p)/N}} < Z_{1-\alpha/2}) = 1 - \alpha$$

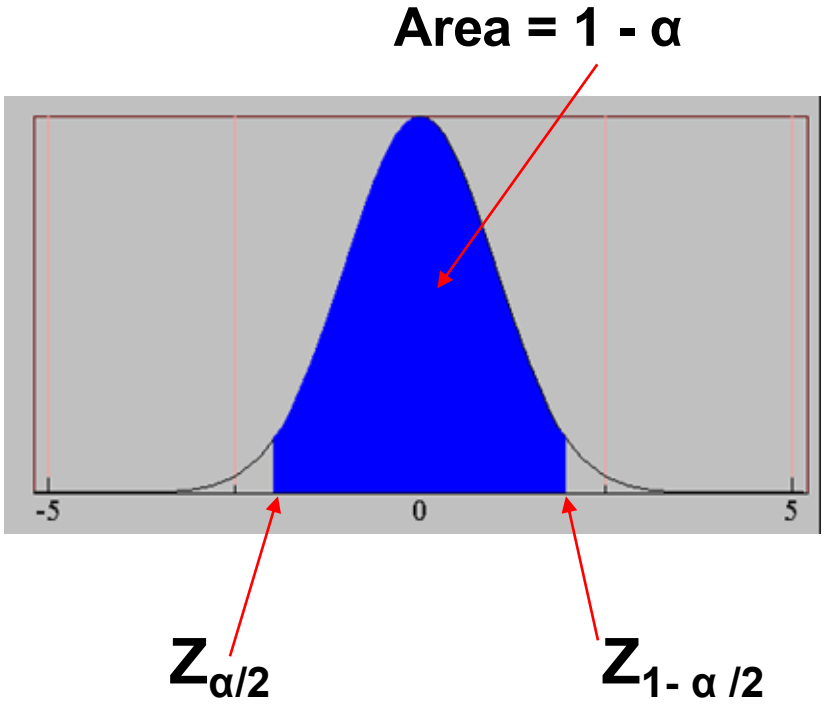

- Confidence Interval for p:

$$p = \frac{2 \times N \times acc + Z^2_{\alpha/2} \pm \sqrt{Z^2_{\alpha/2} + 4 \times N \times acc - 4 \times N \times acc^2}}{2(N + Z^2_{\alpha/2})}$$

Confidence Interval for Accuracy

- Consider a model that produces an accuracy of 80% when evaluated on 100 test instances:
  - N=100, acc = 0.8
  - Let 1-α = 0.95 (95% confidence)
  - **Which is the confidence interval?**
  - From probability table, $Z_{\alpha/2}$=1.96

1-α	Z
0.99	2.58
0.98	2.33
0.95	1.96
0.90	1.65

N	50	100	500	1000	5000
p(lower)	0.670	0.711	0.763	0.774	0.789
p(upper)	0.888	0.866	0.833	0.824	0.811

Comparing Performance of 2 Models

- Given two models, say M1 and M2, which is better?
  - M1 is tested on D1 (size=n1), found error rate = e_1
  - M2 is tested on D2 (size=n2), found error rate = e_2
  - Assume D1 and D2 are independent
  - If n1 and n2 are sufficiently large, then

$$e_1 \sim N(\mu_1, \sigma_1)$$
$$e_2 \sim N(\mu_2, \sigma_2)$$

  - Approximate variance of error rates: $\hat{\sigma}_i = \frac{e_i(1-e_i)}{n_i}$

Comparing Performance of 2 Models

- To test if performance difference is statistically significant: $d = e_1 - e_2$
  - $d \sim N(d_t, \sigma_t)$ where d_t is the true difference
  - Since D1 and D2 are independent, their variance adds up:

$$\sigma_t^2 = \sigma_1^2 + \sigma_2^2 \cong \hat{\sigma}_1^2 + \hat{\sigma}_2^2$$

$$= \frac{e1(1-e1)}{n1} + \frac{e2(1-e2)}{n2}$$

  - It can be shown at (1-α) confidence level,

$$d_t = d \pm Z_{\alpha/2}\hat{\sigma}_t$$

An Illustrative Example

- Given: M1: n1 = 30, e1 = 0.15
  M2: n2 = 5000, e2 = 0.25

- d = |e2 – e1| = 0.1 (2-sided test to check: dt = 0 or dt <> 0)

$$\hat{\sigma}_d^2 = \frac{0.15(1-0.15)}{30} + \frac{0.25(1-0.25)}{5000} = 0.0043$$

- At 95% confidence level, $Z_{\alpha/2}$=1.96

$$d_t = 0.100 \pm 1.96 \times \sqrt{0.0043} = 0.100 \pm 0.128$$

=> Interval contains 0 => difference may not be statistically significant